

GTS-PP-100

3LPP Hybrid Coating System

The GTS-PP-100 system is a hybrid system combining a Polypropylene backing with a thermoplastic hybrid adhesive. This combination results in a product with the mechanical protection of polypropylene with the ease of installation of a traditional adhesive. This also allows for a lower preheat temperature and faster application than found with traditional 3LPP systems.

Superior Mechanical Protection

- The GTS-PP-100 sleeve has superior impact and shear resistance by virtue of its polypropylene backing. The sleeve is engineered for use in offshore applications where mechanical resistance is required and the rapid cooling of polypropylene allows better resistance to offshore laying rollers

Unique Adhesive Technology

- Allows for lower installation pre-heat temperatures and superior bonding to PP, PE and FBE coatings
- The adhesive has been formulated to bond directly to the mainline coating; epoxy is applied to the steel only

Flexible installation


- GTS-PP-100 can be used as either a 2-layer or a 3-layer sleeve system with the same low preheat temperature
- For added flexibility, the sleeve can be supplied as either pre-cut to the required pipe sizes or as bulk rolls.

Long Term Corrosion Protection

- Provides a protective coating with the structural integrity of a seamless tube, providing excellent resistance to cathodic disbondment and excellent durability against abrasion and chemical attack.

Saves time and Money

- Lower pre-heat means less time heating and a faster installation.

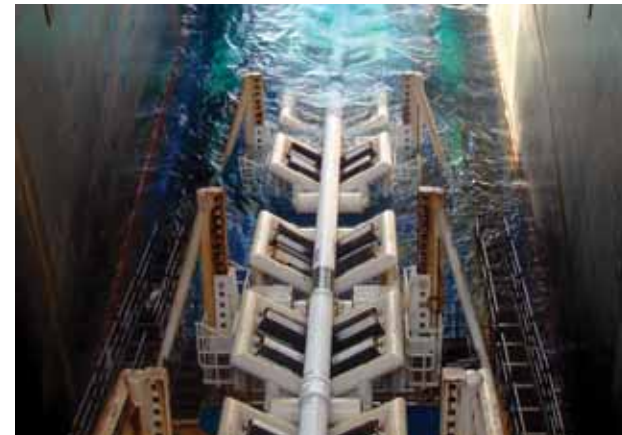

Applications



Oil & Gas



Offshore, J & S Lay



High Abrasion Environments



High Moisture Environments



GTS-PP-100

3LPP Hybrid Coating System

Sleeve Operating Characteristics	Test Method	Typical Values	
Pipeline Operating Temp.		Up to 100°C (212°F)*	
Minimum Installation Temp.		90°C (194°F)	
Main Line Coating Compatibility		PP, PE, FBE	
Rapid Quenching Ability		Excellent	
Adhesive Properties			
Softening Point	ASTM E28	124°C	
Lap Shear @ 23°C	EN 12068	52 N/cm ²	
Lap Shear @ 50°C	EN 12068	2.75 N/cm ²	
Backing Properties			
Tensile Strength	ASTM D638	28 MPa	
Elongation	ASTM D638	425%	
Hardness	ASTM D2240	65 Shore D	
Volume Resistivity	ASTM D257	2 x 10 ¹⁷ ohm-cm	
Sleeve Properties			
Adhesion Strength @ 23°C	EN 12068	> 50 N/cm	
Indentation Resistance	EN 12068	Pass	
Impact Resistance	NF A 49-711	10 J/mm	
Cathodic Disbondment @ 23°C, 28 days	ASTM G8	< 10 mm	
Cathodic Disbondment @ 23°C, 28 days (with epoxy)	ASTM G8	< 3 mm	
Bending Resistance	GBE/CW6	Pass	
Thickness	T	L	S
Backing (nominal thickness as supplied)	0.9 mm (0.035")	0.9 mm (0.035")	1.1 mm (0.045")
Adhesive (nominal thickness as supplied)	0.9 mm (0.035")	1.4 mm (0.055")	1.5 mm (0.060")

* Actual temperature rating is dependant on specific project requirements and conditions. Please consult your local Canusa representative.

Epoxy usage can be referenced on the Liquid Epoxy, Type E Product Data Sheet.

Since 1967, Canusa-CPS has been a leading developer and manufacturer of specialty pipeline coatings for the sealing and corrosion protection of pipeline joints and other substrates. Canusa-CPS high performance products are manufactured to the highest quality standards and are available in a number of configurations to accommodate many specific project applications.

The product information shown here is intended as a guide for standard products.

Consult your Canusa representative for specific projects or unique applications.



Canusa-CPS
A division of Shawcor Ltd.

Head Office

25 Bethridge Road
Toronto, ON, Canada M9W 1M7
Tel: +1 416 743 7111
Fax: +1 416 743 5927

Canada

Dome Tower St. 2200, 333-7th Avenue SW
Calgary, AB, Canada T2P 2Z1
Tel: +1 403 218 8207
Fax: +1 403 264 3649

Americas

5875 N. Sam Houston Pkwy W., Suite 200
Houston, TX, USA 77086
Tel: +1 281 886 2350
Fax: +1 281 886 2353

Middle East

ADPC - Mussafah Port, P.O. Box 2621
Abu Dhabi, UAE
Tel: +971 2 496 3500
Fax: +971 2 496 3501

Europe, Africa & Russia

Dellaertweg 9-E, Gebouw "Le Carrefour"
2316 WZ Leiden, The Netherlands (NL)
Tel: +31 71 80 802 70
Fax: +31 71 80 802 71

Asia-Pacific

101 Thomson Road, #11-03 United Square
307591 Singapore
Tel: +65 6749 8918
Fax: +65 6749 8919

**Quality Management system
registered to ISO 9001**

Canusa warrants that the product conforms to its chemical and physical description and is appropriate for the use stated on the product data sheet when used in compliance with Canusa's written instructions. Since many installation factors are beyond our control, the user shall determine the suitability of the products for the intended use and assume all risks and liabilities in connection therewith. Canusa's liability is stated in the standard terms and conditions of sale. Canusa makes no other warranty either expressed or implied. All information contained in this data sheet is to be used as a guide and is subject to change without notice. This data sheet supersedes all previous data sheets on this product. E&OE

PDS_GTSP100_rev019



Universal Corrosion Coatings Pty. Ltd.
16 Sperry Drive, Tullamarine, VIC 3043, Australia
T: +61 3 9310 3515 | F: +61 3 9310 3524 | www.unicc.com.au

CANUSA-CPS